


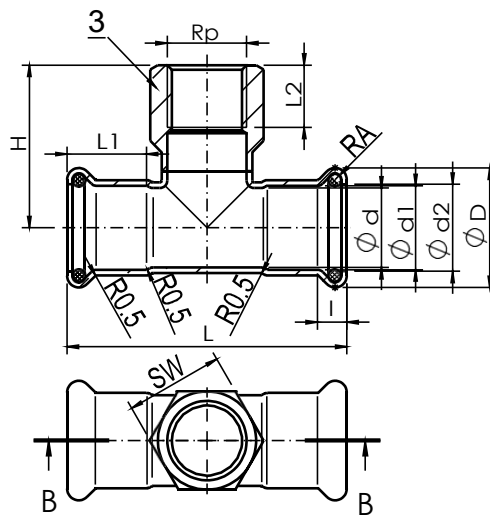

edelstahl24
BESTES NIRO. KLEINSTER PREIS.

DN	T	d	d1	d2	D	RA	l	L	H	L1	Rp	L2	SW
15×Rp1/2	1.5	14	15.2 ^{+0.2} ₀	15.9 ^{+0.2} ₀	23.2±0.2	1.25	6.7	66	38	20	1/2	15.5	24
18×Rp1/2	1.5	17	18.2 ^{+0.2} ₀	18.9 ^{+0.2} ₀	26.2±0.2	1.25	6.7	68	41	20	1/2	15.5	24
18×Rp3/4	1.5	17	18.2 ^{+0.2} ₀	18.9 ^{+0.2} ₀	26.2±0.2	1.25	6.7	68	43	20	3/4	17	30
22×Rp1/2	1.5	21	22.2 ^{+0.2} ₀	23 ^{+0.2} ₀	31.6±0.2	1.6	7.9	74	42	21	1/2	15.5	24
22×Rp3/4	1.5	21	22.2 ^{+0.2} ₀	23 ^{+0.2} ₀	31.6±0.2	1.6	7.9	74	45	21	3/4	17	30
28×Rp1/2	1.5	27	28.2 ^{+0.2} ₀	28.9 ^{+0.2} ₀	37.2±0.2	1.5	7.5	84	45	23	1/2	15.5	24
28×Rp3/4	1.5	27	28.2 ^{+0.2} ₀	28.9 ^{+0.2} ₀	37.2±0.2	1.5	7.5	84	47	23	3/4	17	30
28×Rp1	1.5	27	28.2 ^{+0.2} ₀	28.9 ^{+0.2} ₀	37.2±0.2	1.5	7.5	84	52	23	1	19.5	36
35×Rp1/2	1.5	34	35.3 ^{+0.3} ₀	36 ^{+0.3} ₀	44.3±0.3	1.5	7.5	100	49	26	1/2	15.5	24
35×Rp3/4	1.5	34	35.3 ^{+0.3} ₀	36 ^{+0.3} ₀	44.3±0.3	1.5	7.5	100	51	26	3/4	17	32
35×Rp1	1.5	34	35.3 ^{+0.3} ₀	36 ^{+0.3} ₀	44.3±0.3	1.5	7.5	100	56	26	1	19.5	36
35×Rp1 1/4	1.5	34	35.3 ^{+0.3} ₀	36 ^{+0.3} ₀	44.3±0.3	1.5	7.5	100	57	26	1 1/4	21.5	46
42×Rp1/2	1.5	41	42.3 ^{+0.3} ₀	43 ^{+0.3} ₀	53.3±0.3	2	9.3	114	53	30	1/2	15.5	24
42×Rp3/4	1.5	41	42.3 ^{+0.3} ₀	43 ^{+0.3} ₀	53.3±0.3	2	9.3	114	54	30	3/4	17	30
42×Rp1	1.5	41	42.3 ^{+0.3} ₀	43 ^{+0.3} ₀	53.3±0.3	2	9.3	114	59	30	1	19.5	36
42×Rp1 1/2	1.5	41	42.3 ^{+0.3} ₀	43 ^{+0.3} ₀	53.3±0.3	2	9.3	114	60	30	1 1/2	21.5	52
54×Rp1/2	1.5	53	54.4 ^{+0.4} ₀	55 ^{+0.3} ₀	65.4±0.3	2	9.3	138	58	35	1/2	15.5	24
54×Rp3/4	1.5	53	54.4 ^{+0.4} ₀	55 ^{+0.3} ₀	65.4±0.3	2	9.3	138	60	35	3/4	17	30
54×Rp1	1.5	53	54.4 ^{+0.4} ₀	55 ^{+0.3} ₀	65.4±0.3	2	9.3	138	65	35	1	19.5	36
54×Rp2	1.5	53	54.4 ^{+0.4} ₀	55 ^{+0.3} ₀	65.4±0.3	2	9.3	138	78	35	2	26.5	65
76.1-Rp3/4	2	72.1	76.7 ^{+0.6} ₀	78 ^{+0.5} ₀	94.7±0.5	3.5	16.2	230	70	53	3/4	17	30
76.1-Rp2	2	72.1	76.7 ^{+0.6} ₀	78 ^{+0.5} ₀	94.7±0.5	3.5	16.2	230	88	53	2	26.5	65
88.9-Rp3/4	2	84.9	89.5 ^{+0.6} ₀	91 ^{+0.5} ₀	109.5±0.5	4	18.2	260	78	60	3/4	17	30
88.9-Rp2	2	84.9	89.5 ^{+0.6} ₀	91 ^{+0.5} ₀	109.5±0.5	4	18.2	260	96	60	2	26.5	65
108-Rp3/4	2	104	108.8 ^{+0.8} ₀	111 ^{+0.5} ₀	132.8±0.5	5	21.5	310	86	75	3/4	17	30
108-Rp2	2	104	108.8 ^{+0.8} ₀	111 ^{+0.5} ₀	132.8±0.5	5	21.5	310	104	75	2	26.5	65

Edelstahl24 GmbH

DEUTSCHLAND: Bettinastraße 30, 60325 Frankfurt
ÖSTERREICH: Geisensheim 6, 4632 Pichl bei Wels
E-Mail: office@edelstahl24.com

Telefon: +49 (0) 69 / 1730 9270
Telefon: +43 (0) 720 / 310 966

Geschäftsführer: Ing. Roman Aschl
Firmenbuchgericht: 4600 Wels / Österreich
Firmenbuchnummer: FN 302419i
UID Nr.: ATU 63843103